

FACT SHEET – Firmtread® Anti Slip Deck Coating 2.5L



Main Advantages

Firmtread® Anti Slip Deck Coating is an easy to paint on liquid that will keep you on your feet not your toes, as well as giving the deck a makeover. Better yet, it comes in a choice of clear or five vibrant tints to bring out the natural grains of the wood.

- Provides excellent traction on slippery decking to keep you safe
- Gives weathered decking a new lease of life
- Available in a choice of natural shades to enhance the look of the wood
- Easy to apply, simply paint on with a brush or roller



The Product

Lightly textured, matt finish coating for decking.



Apply It

Stir the product well. Apply by brush or mini roller, wearing gloves. We recommend two coats for maximum protection. The more coats applied, the darker the final result.



Drying Time

Under normal temperatures above 15°C, Firmtread® Deck Coat will be touch dry in 2-4 hours. You can recoat after 8 hours.

Why Firmtread® Anti Slip Deck Coating?

Inevitably decking will weather and start to look past its best. Give it a makeover with Firmtread® Anti Slip Deck Coating and your decking will repay you by looking good and, more importantly, keeping you on your feet.

Prepare It

Your decking must be completely dry before you apply Firmtread® Anti Slip Deck Coating. Do not apply in cold, damp conditions or if rain is forecast that day.

Lichen, algae or grease and oil deposits should be removed for the best possible finish. You can wash your deck with water and a mild detergent and give it a good brushing with a stiff broom, but leave to dry thoroughly.

Cover It

Coverage is approximately 20m² per 2.5 litres pack per coat.

Clean It

Brushes and rollers can be cleaned with white spirit.

Store It

Store in a cool dry place away from children. Unopened, the product will have a shelf life of at least 12 months.

Disposal and Safety Information


Only use in well-ventilated areas. Contains Cobalt carboxylate, ETHYL METHYL KETOXIME. May produce an allergic reaction. Keep out of the reach of children. If swallowed, seek medical advice immediately and show the container or label. Do not pour any leftover products into drains. Refer to your local authority website for disposal information.

Please see the Material Safety Data Sheet at www.floorpaintexpress.co.uk for safety information.

Availability

Firmtread® Anti Slip Deck Coating is supplied in 2.5 litre (1/2 gallon) containers. Available from www.floorpaintexpress.co.uk

Colour Range

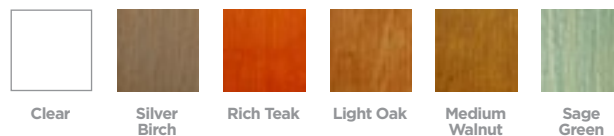

Call us now for deals and support

Tel: 0845 894 0703 Email: info@floorpaintexpress.co.uk Visit: www.floorpaintexpress.co.uk